



## ΚΑΤΑΓΡΑΦΙΚΟ ΑΥΤΟΚΙΝΗΤΟΥ 4 ΚΑΝΑΛΙΩΝ AVerDiGi MOB1304 NET




AVerMedia INFORMATION is proud to announce the new generation mobile DVR, AVerDiGi MOB1304 NET. Great combinations with Central Management System (CM3000) and various remote access tools, users can have the best control on the safety of passengers and vehicle. Its various applications of dual-monitor function and smart alarm mechanisms also


make it have the capability to secure every trip from beginning to the end

- Stable power supply for 4 cameras and able to operate under low voltage
- GPS function – showing vehicle location and speed in both live and recorded video (GPS receiver required)
- Dual-monitor function can be output as rear view monitor and general LCD or TV monitor simultaneously
- Support up to 4CH PTZ control
- Advanced Alarm Mechanisms
- Voltage Detection – Shut down the DVR or trigger alarm when encountering low voltage
- Pen drive for backup and UPC software supports HDD to HDD quick backup and instant events playback.
- Image protection mechanism: Watermark/ Encryption/ Time Stamp/ Shield
- Shockproof by rubber vibration insulator and brackets for double protection
- Support 2.5" or 3.5" hot swappable SATA HDD
- Power circuit protection for peak voltage
- Delay Power off – Keep monitor on after turning off the car, so users can continue monitoring via CM3000 and WebViewer
- Remote control up to 4 DVRs simultaneously regardless of different locations.
- Enabling to play own video to show information to passengers
- Support Daylight Saving
- Shock Detection – trigger alarm when hit by specified level of external force
- SMS alarm – Send GPS position and alarm message via GSM(GSM module) and 3G network (3G USB Dongle required)
- Wireless connection via WLAN environment (WiFi module)

Remote Software Integration: CM3000/CM3000 Gold, WebViewer, PDAViewer, iPhone-Viewer and JavaViewer




## ΕΞΕΙΔΙΚΕΥΜΕΝΕΣ ΚΑΜΕΡΕΣ ΕΣΩΤΕΡΙΚΕΣ / ΕΞΩΤΕΡΙΚΕΣ

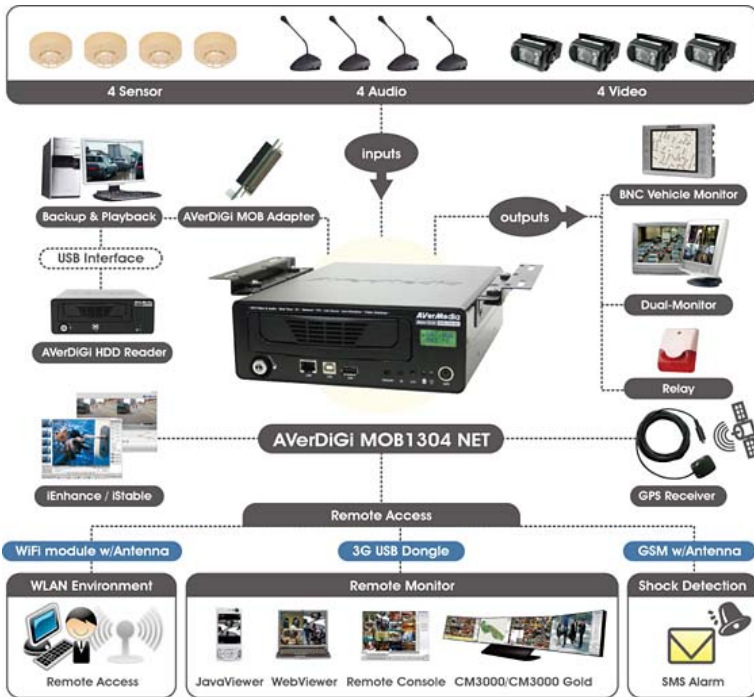

Front



Rear

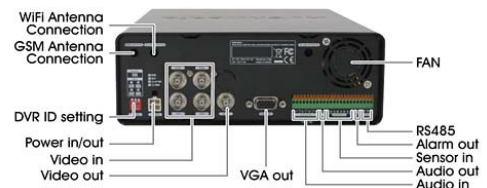

Item	AVerDiGi MOB1304 NET
Video Compression	MPEG4
Video In/ Video out	4/2
Video Output	VGA x 1, BNC x 1
Audio In/ Audio Out	4/1
Sensor In/ Relay Out	4/1
Display Frame Rate (NTSC/PAL)	Real-Time
Recording Frame Rate (NTSC/PAL)	CIF: 120/100 fps D1: 60/50 fps D1 Enhance: 30/25 fps
Dual Monitor Output	3 kinds of outputs: MAIN/SPOT, MAIN/MAIN, SPOT/MAIN
User Input device	Mouse, remote control, LCM
Backup Device	USB A-type x 1 (connect with USB mouse, storage), USB B-type x 1 (connect with PC/NB)
Number of HDDs Supported	1 (One removable 3.5" or 2.5" SATA HDD)
RS485 connector	Built-in RS485 connector for PTZ, Multi-DVR connection
RS232	1, PS2 connector
Network	10/100Mbps, RJ-45 x 1
Power Source	DC12~24V
Power Output	12V DC, 2A, supports camera power
Operating Temperature	0°C~50°C*
Remote Access	WebView, Remote Console, JavaViewer, iPhoneViewer, CM3000/CM3000Gold
Software Support	iStable(Video Stabilizer software), iEnhance(Video processing software for better video quality), USB Playback Console
Bundled Accessories	Remote control, Extended IR cable, Camera power line, Z-bracket
Dimensions (WxHxD)	258mm(W)x80mm(H)x200mm(D)
Net Weight	2.2 Kgs



[www.e-arion.gr](http://www.e-arion.gr)

**e-arion ABEE**  
 Ιδιωτική Επιχείρηση Παροχής Υπηρεσιών Ασφαλείας  
 Λ.Κηφισίας 56α, Μαρούσι  
 15125 ΑΘΗΝΑ  
 T:210 6775-323 F:210 6712-351 E:info@e-arion.gr

